


DENAIR[®]

Low Pressure Screw Air Compressor



Energy Saving First Mutual Value Shared

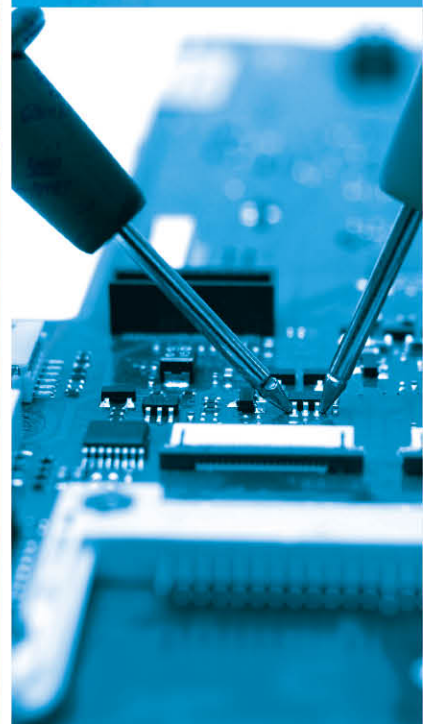

DENAIR Low Pressure Double Screw Air Compressor

Technical Parameters

| Type | Maximum working pressure | | Capacity FAD | | Installed motor power | | Driving Mode Cooling Method | Dimensions(mm) | | | Weight (kg) |
|------------|--------------------------|--------|---------------------|--------|-----------------------|------|---|----------------|------|------|-------------|
| | bar(e) | psig | m ³ /min | cfm | kW | hp | | L | W | H | |
| DAL-22A-3 | 3 | 44 | 5.94 | 209.7 | 22 | 30 | Belt Driven A-Air cooling | 1450 | 975 | 1255 | 800 |
| DAL-30A-3 | | | 7.72 | 272.6 | 30 | 40 | | 1650 | 1200 | 1350 | 1100 |
| DAL-37A-3 | | | 10.01 | 353.5 | 37 | 50 | | 1650 | 1200 | 1350 | 1300 |
| DAL-45A-3 | | | 12.11 | 427.6 | 45 | 60 | | 1700 | 1200 | 1350 | 1700 |
| DAL-55A-3 | | | 13.11 | 462.9 | 55 | 75 | | 1900 | 1200 | 1500 | 2000 |
| DAL-75A-3 | | | 23.98 | 846.7 | 75 | 100 | Direct Driven A-Air cooling W-Water cooling | 2150 | 1350 | 1650 | 2400 |
| DAL-90A-3 | | | 25.24 | 891.2 | 90 | 120 | | 2600 | 1550 | 1800 | 2800 |
| DAL-110A-3 | | | 26.34 | 930.1 | 110 | 150 | | 2600 | 1550 | 2000 | 3500 |
| DAL-132A-3 | | | 32.8 | 1158.2 | 132 | 175 | | 2600 | 1550 | 2000 | 3800 |
| DAL-160A-3 | | | 44.12 | 1557.9 | 160 | 215 | | 2800 | 1950 | 2000 | 4200 |
| DAL-185A-3 | | | 44.5 | 1571.3 | 185 | 250 | | 2800 | 1950 | 2000 | 4500 |
| DAL-200A-3 | | | 59.94 | 2116.5 | 200 | 270 | | 3700 | 1900 | 2200 | 4800 |
| DAL-250A-3 | | | 75.06 | 2650.4 | 250 | 350 | | 4250 | 2200 | 2200 | 6700 |
| DAL-90W-3 | | | 25.24 | 891.2 | 90 | 120 | | 2450 | 1600 | 1800 | 2800 |
| DAL-110W-3 | | | 26.34 | 930.1 | 110 | 150 | | 2600 | 1550 | 2000 | 3500 |
| DAL-132W-3 | | | 32.8 | 1158.2 | 132 | 175 | | 2600 | 1550 | 1900 | 3800 |
| DAL-160W-3 | | | 44.12 | 1557.9 | 160 | 215 | | 2800 | 1950 | 2000 | 5000 |
| DAL-185W-3 | | | 44.5 | 1571.3 | 185 | 250 | | 2800 | 1950 | 2000 | 5500 |
| DAL-200W-3 | | | 59.94 | 2116.5 | 200 | 270 | | 3500 | 2200 | 2210 | 6300 |
| DAL-250W-3 | | | 75.06 | 2650.4 | 250 | 350 | | 3500 | 2200 | 2210 | 7200 |
| DAL-355W-3 | 84.24 | 2974.5 | 355 | 475 | 4550 | 2300 | 2350 | 9200 | | | |
| DAL-22A-5 | 5 | 73 | 5.62 | 198.4 | 22 | 30 | Belt Driven A-Air cooling | 1450 | 975 | 1255 | 800 |
| DAL-30A-5 | | | 6.8 | 240.1 | 30 | 40 | | 1650 | 1200 | 1350 | 1100 |
| DAL-37A-5 | | | 7.56 | 266.9 | 37 | 50 | | 1650 | 1200 | 1350 | 1100 |
| DAL-45A-5 | | | 9.94 | 351 | 45 | 60 | | 1700 | 1200 | 1350 | 1700 |
| DAL-55A-5 | | | 12.96 | 457.6 | 55 | 75 | | 1900 | 1200 | 1500 | 2000 |
| DAL-75A-5 | | | 17.43 | 615.5 | 75 | 100 | 2150 | 1350 | 1650 | 2400 | |
| DAL-90A-5 | | | 20.41 | 720.7 | 90 | 120 | 2600 | 1550 | 1800 | 2800 | |
| DAL-110A-5 | | | 25.01 | 883.1 | 110 | 150 | 2600 | 1550 | 2000 | 3500 | |
| DAL-132A-5 | | | 26.03 | 919.1 | 132 | 175 | 2600 | 1550 | 2000 | 3800 | |
| DAL-160A-5 | | | 32.57 | 1150 | 160 | 215 | 2800 | 1950 | 2000 | 4200 | |
| DAL-185A-5 | | | 43.44 | 1533.9 | 185 | 250 | 2800 | 1950 | 2000 | 4500 | |
| DAL-200A-5 | | | 52.74 | 1862.2 | 200 | 270 | 3700 | 1900 | 2200 | 4800 | |
| DAL-250A-5 | | | 59.94 | 2116.5 | 250 | 350 | 4250 | 2200 | 2200 | 6700 | |
| DAL-90W-5 | | | 20.41 | 720.7 | 90 | 120 | 2450 | 1600 | 1800 | 2800 | |
| DAL-110W-5 | | | 25.01 | 883.1 | 110 | 150 | 2600 | 1550 | 2000 | 3500 | |
| DAL-132W-5 | | | 26.03 | 919.1 | 132 | 175 | 2600 | 1550 | 1900 | 3800 | |
| DAL-160W-5 | | | 32.57 | 1150 | 160 | 215 | 3100 | 1700 | 1900 | 5000 | |
| DAL-185W-5 | | | 43.44 | 1533.9 | 185 | 250 | 3100 | 1700 | 1900 | 5500 | |
| DAL-200W-5 | | | 52.74 | 1862.2 | 200 | 270 | 3500 | 2200 | 2210 | 7200 | |
| DAL-250W-5 | | | 59.94 | 2116.5 | 250 | 350 | 3500 | 2200 | 2210 | 7200 | |